

TACKLE THE TOUGHEST SPREADING AND GRADING JOBS WITH WOODS® BOX SCRAPERS. FROM THE REINFORCED STEEL A-FRAME TO THE TOUGH, REVERSIBLE CUTTING EDGE AND REPLACEABLE SCARIFIERS, OUR BOX SCRAPERS DELIVER EXCEPTIONAL DURABILITY AND VERSATILITY.

- Easily carve into sod and dirt with full-length, high-strength, double beveled cutting edges.
- Widths from 48 to 96 inches to match a variety of jobs.

- Tackle the most rugged jobs with high-strength moldboards.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch readiness.

TRACTOR HP RANGE: UP TO 45 HP

GBC48 | 48-inch
BSS54 | 54-inch
BSS60 | 60-inch
BSS65 | 65-inch
BSS72 | 72-inch

- Hardened scarifier teeth with replaceable tips
- High-carbon reversible/replaceable cutting edges leaves a level finish



BSS72

TRACTOR HP RANGE: 40 - 65 HP

BSM72 | 72-inch
BSM84 | 84-inch

- Offers optional floating, hinged tailgate to provide maximum down force on cutting edge
- End plates: .5-inch – 33% heavier end plates than our BSS models
- One-quarter-inch plate welded inside of end plates to increase life

MODEL	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
Tractor Engine (HP)	Up to 25	Up to 45				40-65	
Tractor Hitch	Ltd CAT 1 & CAT 1	CAT 1				CAT 1 & CAT 2	
Working Width (in)	48	54	60	65	72	72	84
Capacity (cubic feet)	9	9.7	10.8	11.7	13.0	13.0	15.1
Approximate Weight (lbs)	285	486	514	528	551	680	750
Scarifier Depth (in)	0-1.5	0, 1.5 or 3 adjustable					
Number of Scarifiers	4	4	5	5	6	6	7
Tailgate Type	Fixed					Fixed, floating optional	
Cutting Edges	2						

Woods grading scrapers are ideal for leveling, whether you're filling potholes in gravel driveways or removing a soil berm after installing field tile.

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect.
- Adjustable skid shoes and scarifiers increase performance.
- Tall side frames hold more material for leveling.
- Approachable leading edges and structural reinforcements keep scraper stronger for longer.
- Reversible/replaceable high-carbon cutting edges.

**TRACTOR HP RANGE:
15 - 45 HP**

GSS54P | 53-inch

GSS60P | 59-inch

GSS72P | 71-inch

- Three-point hitch:
Limited CAT 1 and CAT 2
- Fourteen- and sixteen-inch
box heights



GSS72P



GSS54P

TRACTOR HP RANGE: 30 - 65 HP

GSM84P | 83-inch

GSM96P | 95-inch

- Three-point hitch: CAT 1 and CAT 2
- Sixteen-inch box height—one of the tallest in the industry



GSM96P

MODEL	GSS54P	GSS60P	GSS72P	GSM84P	GSM96P
Tractor Engine (HP)	15-30	20-45		30-65	
Hitch Category	Limited CAT 1 & CAT 1	CAT 1		CAT 1 & CAT 2	
Working Width (in)	53	59	71	83	95
Overall Width (in)	58	64	76	88	100
Overall Length (in)	42	46			
Box Height (in)	14	16			
Weight with Scarifiers (lbs)	419	553	655	754	802
Number of Scarifiers	4		5	6	
Scarifier Adjustments	-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5			
Reversible Cutting Edge (in)	0.5 x 6				
Skid Shoe Adjustment	-0.75 to +0.75	-1.0 to +0.5			
Lower Hitch Design	Clevis				

TRACTOR HP RANGE: UP TO 45 HP

RBS54 | 53-inch **RBS60P** | 59-inch
RBS60 | 59-inch **RBS72P** | 71-inch
RBS72 | 71-inch **RBS84P** | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°.
- Reversible, bolt-on cutting edge adds to product life and enables easy replacement.
- Tilt and offset functions for advanced grading applications (premium models).
- Fast, easy, and safe hook-ups with ASABE quick-hitch readiness.



**IDEAL FOR
GRADING DIRT
OR GRAVEL,
CLEANING UP
CONSTRUCTION
SITES AND
MOVING SNOW.**



RBS72



MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P
Tractor Engine (HP)	Up to 30			20-45		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width (in)	53	59	71	59	71	83
Moldboard Height (in)	12			15		
Moldboard Thickness (in)	0.182 (grade 80 steel)			0.250 (grade 80 steel)		
Weight (lbs)	134	142	156	268	288	308
Double-beveled, Reversible Cutting Edge Dimensions (in)	0.375 x 6			0.5 x 6		
Angle Adjustments (degrees)	5 positions up to 30					
Offset Adjustments (in)	—	—	—	Up to 12 left or right		
Tilt Adjustments (degrees)	—	—	—	Up to 15		
End Plates	—	—	—	Optional		
Skid Shoes	Optional					
Parking Stand	Optional					
ASABE Quick-hitch Ready	Yes					

RB72.50

TRACTOR HP RANGE: 30 - 65 HP

RB72.50 | 71-inch
RB84.50 | 83-inch
RB96.50 | 95-inch

- Seventeen-inch high, 1/4-inch thick moldboard.
- Double-beveled, reversible, and hardened cutting edge for long life.
- Fully manual offers angle, offset, and tilt adjustments.
- Optional end plates, skid shoes, and hydraulic angle kit (includes relief valve).
- Convenient parking stand is standard.

TRACTOR HP RANGE: 40 - 85 HP

RB84.60 | 83-inch
RB96.60 | 95-inch

- Seventeen and 1/2 inch high, 5/16-inch thick moldboard.
- Double-beveled, reversible, and hardened cutting edge for long life.
- Choose manual or hydraulic, featuring angle, offset, and tilt adjustments.
- Optional end plates, skid shoes, tailwheel, and selector valve.
- Convenient parking stand is standard.

TRACTOR HP RANGE: 50 - 150 HP

RB850 | 95-inch
RB1010 | 119-inch

- Three-point hitch: CAT 2 and 3.
- Available as fully hydraulic, fully manual or combination cylinder options.
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset).
- Tough, dozer-type full box construction.

MODEL	RB72.50	RB84.50	RB96.50	RB84.60	RB96.60	RB850	RB1010
Tractor Engine (HP)	30-65			40-85		50-100	80-150
Tractor Hitch	CAT 1 & CAT 2			CAT 1 & CAT 2		CAT 2	CAT 2 & CAT 3
Working Width (in)	71	83	95	83	95	95	119
Moldboard Height (in)	17			17.5		17	18
Moldboard Thickness (in)	0.25 (grade 80 steel)			0.313 (grade 80 steel)		0.313	0.25
Weight (lbs)	455	475	495	705	730	1,233	1,535
Double-beveled, Reversible Cutting Edge Dimensions (in)	0.5 x 6						
Angle Adjustments (degrees)	7 positions up to 45 (mech or hyd)			Up to 45 (mech or hyd)		9 forward up to 60; 5 reverse up to 30 (mech or hyd)	Up to 60 (hyd)
Offset Adjustments (in)	6, 12, 18 left or right			Up to 20 (mech or hyd)		Up to 24 (mech or hyd)	Up to 33 (mech or hyd)
Tilt Adjustments (degrees)	5 positions up to 23			Up to 23 (mech or hyd)		Up to 30 (mech or hyd)	Up to 28 (mech or hyd)
Tailwheel	—			Optional			
Parking Stand	Standard						
ASABE Quick-hitch Ready	Yes						

BALE SPEARS

Single, double, and triple bale spears let you efficiently move and stack round and large square bales.


BS3044 | Single Spear

BS6044 | Double Spear

BS4032 | Triple Spear


All models are available for loader and tractor attachment systems:

- Durable drop-forged spears and high strength steel frame provide longer product life.
- High carry load ratings increase performance.
- Optional step kit enables easier access to loader cabs.
- Optional vertical backstops on the triple bale spear allow stacking while transporting.
- Loader, ISO, or John Deere® Quick Attach available.

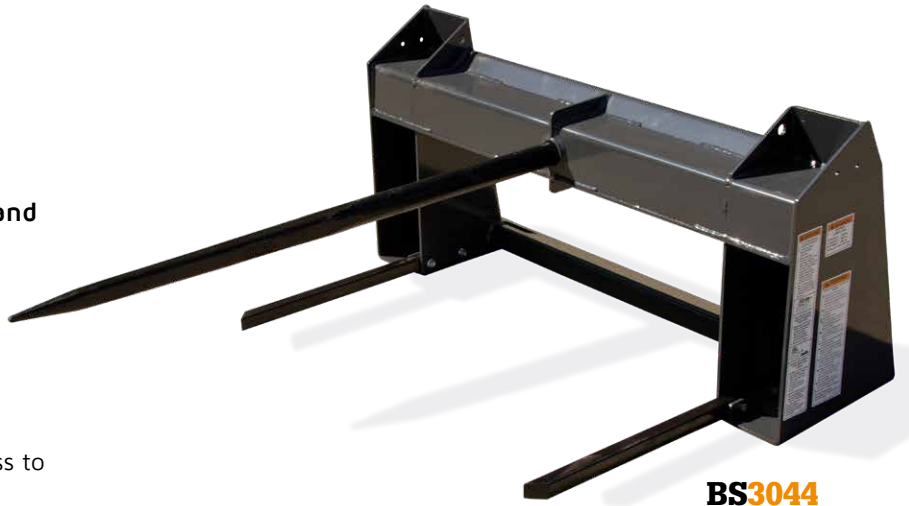

MODEL	BS3044	BS6044	BS4032
Number of Spears	1	2	3
Number of Stabilizer Spikes	2	n/a	
Usable Spear Length (in)	44		32
Spear Diameter (mm)	45		
Maximum Carry Load (lbs)	3,000	6,000	4,000
Spear Material	Drop-forged steel		
Frame Material	High-strength steel plate		
Frame Dimensions (in) (W x H)	45 x 21		57.5 x 21
Quick Attach Systems	BS3044 available in all 3 systems, BS6044 and BS4032 only in Euro and Loader		
Step Kit	Optional		
Vertical Backstops	n/a		Standard

WOODS' VERSATILE, PALLET FORKS ARE DESIGNED WITH A FULL-HEIGHT FRAME AND WALK-THRU CAPABILITY. IDEAL FOR LIFTING AND MOVING MATERIAL WITH YOUR LOADER. CHOOSE FROM 2,200, 4,400, OR 6,600 LB. FORK CAPACITY.

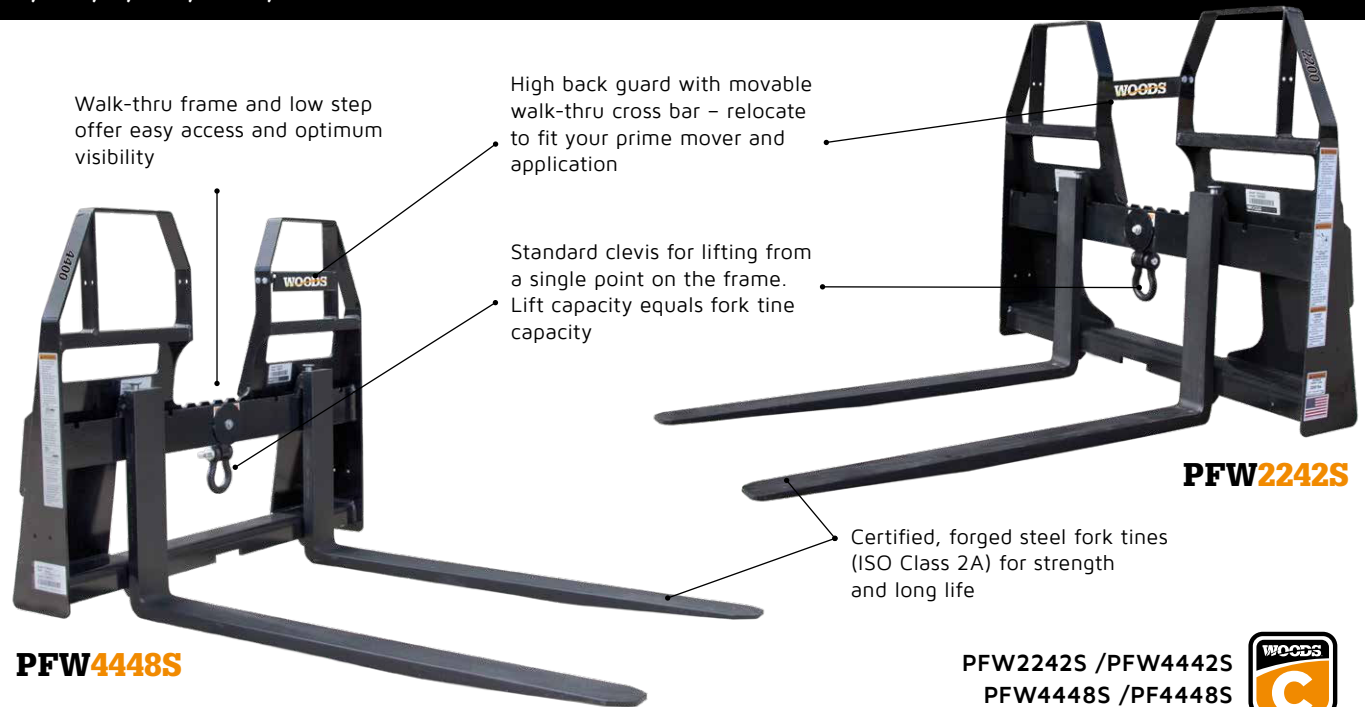

PFW2242S /PFW4442S
PFW4448S /PF4448S



MODEL	PFW2242S	PFW2242JD	PFW4442S
Frame Type	Walk-thru with full frame option		
Coupler System Compatibility	Skid steer	John Deere®	Loader
Operating Weight (lbs)	275	255	360
Fork Capacity at 19.7 in from Tine Face (lbs)	2,200	2,200	4,400
Fork Tine Dimensions (L x W x H) (in)	42 x 3.2 x 1.2		48 x 3.9 x 1.4
Fork Tine Spread Range (in)	12 - 45 outside to outside		
Fork Tine Type	Double hook lock down (ISO Class 2A)		
Clevis	Standard		

MODEL	PF4448S	PFW4448S	PFW4448JD	PFW4448E	PFW6648S	PFW6648E
Frame Type	Full frame	Walk-thru with full frame option				
Coupler System Compatibility	Loader	Loader	John Deere®	ISO 23206	Loader	ISO 23206
Product Weight (lbs)	390	380	380	370	470	455
Fork Capacity at 19.7 in from Tine Face (lbs)	4,400	4,400	4,400	4,400	6,600	6,600
Fork Tine Dimensions (L x W x H) (in)	48 x 3.9 x 1.4				48 x 3.9 x 1.8	
Fork Tine Spread Range (in)	12 - 45 outside to outside					
Fork Tine Type	Double hook lock down (ISO Class 2A)					
Clevis	Standard					

Robotically welded for consistent high quality. Compatible with Loader (ISO 24410), John Deere®, and ISO 23206 Quick Attach Systems.