

TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style

REPLACEMENT TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

TOOTH SERIES REFERENCE CHARTS

Cat Tooth Series	Tooth Fasteners		Type 1 Short	Type 2 Long	Type 3 Heavy Long	Type 4 Tiger	Type 5 Twin Tiger	Type 6 Abrasive	Type 7 AP All Purpose
	Pin	Washer							
J200	9W7112P	4T0001W	7T8202HX 1U3201HX	1U3202HX	-	T1U3202	1U3202WT	4T2203HX	-
J225	6Y3228P	3G9609W	-	6Y3222HX	8E4222HX	T6Y3222	6Y3222WT (101-0706)	-	-
J250	9J2258P	3G9609W	1U3251HX	1U3252HX	9N4252HX	T1U3252	1U3252WT (101-0707)	4T2253HX	1U3252AP
J300	9J2308P	3G9609W	1U3301HX	1U3302HX	9N4302HX	T1U3302 T1U3302L	1U3302WT 1U3302WTL (101-0708)	4T2303HX	1U3302AP
J350	9J2358P	6Y9459W	1U3351HX	1U3352HX	9N4352HX	T1U3352 T1U3352L	1U3352WT 1U3352WTL (101-0709)	4T2353HX	1U3352AP
J400	7T3408P	7T3409W	7T3401HX	7T3402HX	8E4402HX	T7T3402	7T3402WT	7T3403HX	-
J450 J460	6Y2527P 8E0468P	6Y9459W 8E0469W	-	9W8452HX	9N4452HX	T1U3452 T1U3452L	1U3452WT 1U3452WTL (101-0711)	9W1453HX 9W1453HHX 9N4453HX	1U3452AP
J550	6Y8558P	8E5559W	1U3551HX	9W8552HX	9N4552HX	T1U3552 T1U3552L	1U3552WT 1U3552WTL (101-0712)	9W1553HX 6Y2553HX 9J4553HX 9J4553HHX	1U3552AP
J600	6I6608P	6I6609W	-	6I6602HX	7Y0602HX	T6I6602	6I6602WT	6I6603HX	-
J700	4T4708P	4T4707W	-	4T4702HX	-	-	-	4T4703HX	-

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style

REPLACEMENT TEETH FOR EXCAVATORS, LOADERS & SCRAPERS


TOOTH SERIES REFERENCE CHARTS CONTINUED

Cat Tooth Series	Type 8 AGB (Abrasion)	Type 9 Penetrator	Type 10 Rock Penetrator RP2 & RP3	Type 11 Rock Chisel	Type 12 SYL	Type 13 Flare Old Style	Type 14 Flare Standard	Tooth Fasteners	
								Pin	Washer
J200	-	-	-	-	-	1U3202FHX	-	9W7112P	4T0001W
J225	-	6Y8229HX	-	-	-	-	6Y3222F	6Y3228P	3G9609W
J250	-	9J4259HX	4T2253RP2	1U3252RC	-	3G8250HX	-	9J2258P	3G9609W
J300	4T2303AGBHX	9J4309THX	4T2303RP2	1U3302RC	1U3302SYL	4T1300HX	1U3302FHX (107-3300)	9J2308P	3G9609W
J350	4T2353AGBHX	9J4359THX	4T2353RP2	1U3352RC	1U3352SYL	8J3350FHX	1U3352FHX (107-3350)	9J2358P	6Y9459W
J400	7T3403AGBHX	6Y7409HX	7T3403RP2	7T3402RC	8E4402SYL	-	7T3402F (107-3400)	7T3408P	7T3409W
J450 J460	9W1453AGBHX	9J4459THX	9W1453RP2 9W1453RP3	1U3452RC	9W8452SYL	8J1450FHX	1U3452FHX (107-3450)	6Y2527P 8E0468P	6Y9459W 8E0469W
J550	9W11553AGBHX	9W8559HX	9W1553RP2	1U3552RC	9W8552SYL or 9W1553RP3	7J9550FHX	1U3552FHX	6Y8558P	8E5559W (107-3550)
J600	-	7I7609	6I6602RP2 6I6602RP3	6I6602RC	6I6602SYL	-	6I6602F	6I6608P	6I6609W
J700	-	4T4709HX	4T4703RP2 4T4703RP3	4T4702RC	4T4702SYL	-	-	4T4708P	4T4707W

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style



TYPE 1 - SHORT

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J200	7T8202HX	Utility	4.7	119	1.9	49	1.6	40	1.8	47	1.8	0.8
J200	1U3201HX	Short	5.25	133	2.25	57	1.6	40	1.8	47	3.1	1.4
J250	1U3251HX	Short	6.6	167	2.6	65	2.2	55	2.7	68	6.0	2.7
J300	1U3301HX	Short	7.5	191	3.0	76	2.6	67	3.0	77	8.2	3.7
J350	1U3351HX	Short	8.1	206	3.5	89	2.9	75	3.3	84	13.4	6.1
J550	1U3551HX	Short	11.25	286	5.75	146	4.7	119	4.3	110	30.2	13.7




TYPE 2 - LONG

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J200	1U3202HX	Long	5.75	146	2.0	51	1.6	40	1.8	47	2.8	1.3
J225	6Y3222HX	Long	6.6	168	2.25	57	1.9	49	2.3	60	4.6	2.1
J250	1U3252HX	Long	7.5	191	2.6	65	2.2	55	2.7	68	6.4	2.9
J300	1U3302HX	Long	8.6	217	3.0	76	2.6	67	3.0	77	9.8	4.4
J350	1U3352HX	Long	9.5	241	3.6	92	2.9	75	3.3	84	13.5	6.1
J400	7T3402HX	Long	10.5	267	4.25	108	3.5	88	3.7	93	22.9	10.4
J460	9W8452HX	Long	11.4	289	4.5	114	3.9	98	3.9	99	25.5	11.6
J550	9W8552HX	Long	13.2	335	5.6	143	4.7	119	4.3	110	37.9	17.2
J600	6I6602HX	Long	15.0	381	6.5	165	5.6	143	5.2	133	72.0	32.7
J700	4T4702HX	Long	16.5	419	7.1	181	6.0	152	5.7	144	95.0	43.1

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style

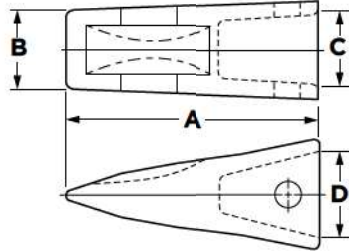

TYPE 3 - HEAVY LONG

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J225	8E4222HX	Heavy	7.0	178	2.2	56	1.9	49	2.3	60	5.6	2.5
J250	9N4252HX	Heavy	7.9	200	2.4	61	2.2	55	2.7	68	8.4	3.8
J300	9N4302HX	Heavy	8.75	222	2.75	70	2.6	67	3.0	77	12.2	5.5
J350	9N4352HX	Heavy	9.9	251	3.5	89	2.9	75	3.3	84	18.0	8.2
J400	8E4402HX	Heavy	11.0	279	4.0	102	3.5	88	3.7	93	24.8	11.3
J460	9N4452HX	Heavy	12.5	317	4.5	114	3.9	98	3.9	99	37.6	17.1
J550	9N4552HX	Heavy	13.75	349	5.75	146	4.7	119	4.3	110	61.0	27.7
J600	7Y0602HX	Heavy	16.0	406	6.5	165	5.6	143	5.2	133	91.0	41.3




TYPE 4 - TIGER

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J200	T1U3202	Standard	6.5	165	-	-	1.6	40	1.8	47	2.4	1.1
J225	T6Y3222	Standard	7.9	200	-	-	1.9	49	2.3	60	4.7	2.1
J250	T1U3252	Short	8.0	203	-	-	2.2	55	2.7	68	6.2	2.8
J300	T1U3302	Short	9.0	229	-	-	2.6	67	3.0	77	9.2	4.1
J300	T1U3302L	Standard	9.5	241	-	-	2.6	67	3.0	77	9.3	4.2
J350	T1U3352	Short	11.0	279	-	-	2.9	75	3.3	84	13.0	5.9
J350	T1U3352L	Standard	11.25	286	-	-	2.9	75	3.3	84	13.2	6.0
J400	T7T3402	Standard	12.5	318	-	-	3.5	88	3.7	93	21.2	9.6
J460	T1U3452	Short	12.0	305	-	-	3.9	98	3.9	99	18.7	8.5
J460	T1U3452L	Standard	14.1	357	-	-	3.9	98	3.9	99	28.7	13.0
J550	T1U3552	Short	13.25	337	-	-	4.7	119	4.3	110	28.5	12.9
J550	T1U3552L	Standard	15.0	381	-	-	4.7	119	4.3	110	35.9	16.3
J600	T6I6602	Standard	18.0	457	-	-	5.6	143	5.2	133	68.0	30.8

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style

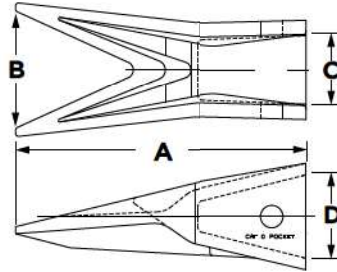


TYPE 5 - TWIN TIGER

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J200	1U3202WT	Standard	6.5	165	3.0	76	1.6	40	1.8	47	3.0	1.4
J225	6Y3222WT	Standard	7.9	200	3.4	86	1.9	49	2.3	60	5.8	2.6
J250	1U3252WT	Short	8.0	203	3.5	89	2.2	55	2.7	68	7.5	3.4
J300	1U3302WT	Short	9.0	229	3.8	97	2.6	67	3.0	77	11.2	5.1
J300	1U3302WTL	Standard	9.5	241	4.2	106	2.6	67	3.0	77	10.7	4.8
J350	1U3352WT	Short	10.5	267	4.75	121	2.9	75	3.3	84	16.1	7.3
J350	1U3352WTL	Standard	11.25	286	4.75	121	2.9	75	3.3	84	14.2	6.4
J400	7T3402WT	Standard	12.5	318	5.6	141	3.5	88	3.7	93	23.8	10.8
J460	1U3452WT	Short	12.0	305	5.75	146	3.9	98	3.9	99	24.5	11.1
J460	1U3452WTL	Standard	14.1	357	6.2	158	3.9	98	3.9	99	31.7	14.4
J550	1U3552WT	Short	13.0	330	6.75	171	4.7	119	4.3	110	32.7	14.8
J550	1U3552WTL	Standard	15.0	381	7.25	184	4.7	119	4.3	110	40.1	18.2
J600	6I6602WT	Standard	18.0	457	9.25	235	5.6	143	5.2	133	76.0	34.5

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style




TYPE 6 - ABRASION											
Cat Tooth Series	Abrasion Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J200	4T2203HX	5.75	146	2.4	60	1.6	40	1.8	47	3.5	1.6
J250	4T2253HX	7.6	192	3.1	79	2.2	55	2.7	68	7.3	3.3
J300	4T2303HX	8.6	219	3.9	98	2.6	67	3.0	77	12.0	5.4
J350	4T2353HX	9.5	241	4.25	108	2.9	75	3.3	84	16.7	7.6
J400	7T3403HX	10.75	273	5.7	144	3.5	88	3.7	93	33.0	14.9
J460	9W1453HX	11.6	295	5.6	143	3.9	98	3.9	99	31.7	14.4
J460	9W1453HHX	11.6	295	5.6	143	3.9	98	3.9	99	36.0	16.3
J460	9N4453HX	12.25	311	6.4	162	3.9	98	3.9	99	55.0	24.9
J550	9J4553HX	13.0	330	6.9	175	4.7	119	4.3	110	50.9	23.0
J550	9J4553HHX	13.0	330	6.75	171	4.7	119	4.3	110	59.0	26.8
J550	9W1553HX	13.1	333	7.0	178	4.7	119	4.3	110	51.5	23.4
J550	6Y2553HX	14.0	356	7.5	191	4.7	119	4.3	110	71.0	32.2
J600	6I6603HX	16.25	413	9.0	229	5.6	143	5.2	133	125.0	56.7
J700	4T4703HX	16.4	416	9.4	238	6.0	152	5.7	144	105.0	47.6


Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style



TYPE 7- ALL PURPOSE											
Cat Tooth Series	All Purpose Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J250	1U3252AP	7.5	191	2.5	64	2.2	55	2.7	68	6.2	2.8
J300	1U3302AP	8.5	216	3.0	76	2.6	67	3.0	77	10.1	4.6
J350	1U3352AP	9.5	241	3.5	89	2.9	75	3.3	84	13.9	6.3
J460	1U3452AP	11.1	283	4.4	111	3.9	98	3.9	99	25.2	11.4
J550	1U3552AP	13.6	346	5.5	140	4.7	119	4.3	110	46.1	20.9




TYPE 8 - AGB											
Cat Tooth Series	AGB (Abrasion) Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J300	4T2303AGBHx	9.0	229	4.0	102	2.6	67	3.0	77	14.5	6.6
J350	4T2353AGBHx	10.0	254	4.75	121	2.9	75	3.3	84	18.7	8.5
J400	7T3403AGBHx	11.5	292	5.75	146	3.5	88	3.7	93	30.3	13.7
J460	9W1453AGBHx	12.25	311	6.0	152	3.9	98	3.9	99	35.3	16
J550	9W1553AGBHx	14.25	362	7.25	184	4.7	119	4.3	110	62	28.1

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style



TYPE 9 - PENETRATOR

Cat Tooth Series	Penetrator Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J225	6Y8229HX	6.6	167	1.25	32	1.9	49	2.3	60	4.2	1.9
J250	9J4259HX	7.6	192	1.3	33	2.2	55	2.7	68	6.3	2.9
J300	9J4309THX	8.5	216	1.5	38	2.6	67	3.0	77	7.8	3.5
J350	9J4359THX	9.9	251	2.0	51	2.9	75	3.3	84	12.3	5.6
J400	6Y7409HX	10.5	267	2.0	51	3.5	88	3.7	93	19.5	8.8
J460	9W8459HX	11.6	295	2.0	51	3.9	98	3.9	99	22.1	10.0
J550	9W8559HX	13.25	337	2.6	67	4.7	119	4.3	110	36.0	16.3
J700	4T4709HX	16.5	419	3.1	79	6.0	152	5.7	144	82.0	37.2

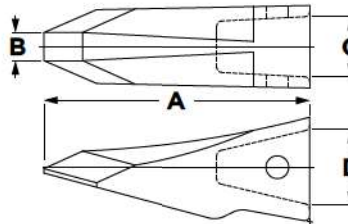


TYPE 10 - ROCK PENETRATOR

Cat Tooth Series	Rock Penetrator Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J250	4T2253RP2	9.5	241	2.6	67	2.2	55	2.7	68	11.9	5.4
J300	4T2303RP2	10.5	267	3.3	84	2.6	67	3.0	77	18.6	8.4
J350	4T2353RP2	11.7	297	3.75	95	2.9	75	3.3	84	26.0	11.8
J400	7T3403RP2	13.0	330	4.1	105	3.5	88	3.7	93	35.6	16.1
J460	9W1453RP2	13.8	351	4.8	123	3.9	98	3.9	99	47.8	21.7
J460	9W1453RP3	14.25	362	4.9	124	3.9	98	3.9	99	52.3	23.7
J550	9W1553RP2	14.75	375	5.2	131	4.7	119	4.3	110	58.0	26.3
J550	9W1553RP3	15.25	387	5.2	131	4.7	119	4.3	110	68.5	31.1
J600	6I6602RP2	17.75	451	6.25	159	5.6	143	5.2	133	109.0	49.4
J600	6I6602RP3	18.5	470	6.5	165	5.6	143	5.2	133	127.0	57.6
J700	4T4703RP2	19.5	495	6.9	175	6.0	152	5.7	144	113.5	51.5
J700	4T4703RP3	19.5	495	7.0	178	6.0	152	5.7	144	148.0	67.1


Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style



TYPE 11 - ROCK CHISEL											
Cat Tooth Series	Rock Chisel Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J250	1U3252RC	8.5	216	2.4	60	2.2	55	2.7	68	8.6	3.9
J300	1U3302RC	9.75	248	2.9	210	2.6	67	3.0	77	12.4	5.6
J350	1U3352RC	11.0	279	3.4	86	2.9	75	3.3	84	17.9	8.1
J400	7T3402RC	12.1	308	3.9	98	3.5	88	3.7	93	26.0	11.8
J460	1U3452RC	13.0	330	4.25	108	3.9	98	3.9	99	31.4	14.2
J550	1U3552RC	15.0	381	5.1	130	4.7	119	4.3	110	50.8	23.0
J600	6I6602RC	18.0	457	6.4	162	5.6	143	5.2	133	86.0	39.0
J700	4T4702RC	19.0	483	6.5	165	6.0	152	5.7	144	105.0	47.6




TYPE 12 - SYL											
Cat Tooth Series	SYL Tooth Part No.	Dimensions								Weight	
		Overall Tooth				Tooth Pocket					
		A		B		C		D			
		"	mm	"	mm	"	mm	"	mm	lb	kg
J300	1U3302SYLHX	9.25	235	3.4	87	2.6	67	3.0	77	10.9	4.9
J350	1U3352SYLHX	10.5	267	4.0	102	2.9	75	3.3	84	16.2	7.3
J400	8E4402SYLHX	11.75	298	4.7	119	3.5	88	3.7	93	24.4	11.1
J460	9W8452SYLHX	12.75	324	5.1	130	3.9	98	3.9	99	29.6	13.4
J550	9W8552SYLHX	14.5	368	6.0	152	4.7	119	4.3	110	48.8	22.1
J600	6I6602SYLHX	16.5	419	7.5	190	5.6	143	5.2	133	76.0	34.5
J700	4T4702SYLHX	18.0	457	7.5	190	6.0	152	5.7	144	95.0	43.1

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR EXCAVATORS, LOADERS & SCRAPERS

Caterpillar Style

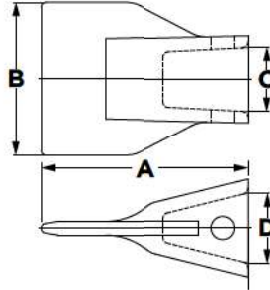

TYPE 13 - OLD STYLE FLARE

Cat Tooth Series	Flare Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J200	1U3202FHX	Old Style	5.0	127	4.4	111	1.6	40	1.8	47	2.8	1.3
J250	3G8250HX	Old Style	7.75	197	4.5	114	2.2	55	2.7	68	9.2	4.2
J300	4T1300HX	Old Style	8.5	216	6.0	152	2.6	67	3.0	77	11.5	5.2
J350	8J3350FHX	Old Style	9.5	241	7.0	178	2.9	75	3.3	84	16.7	7.6
J460	8J1450FHX	Old Style	11.25	286	9.0	229	3.9	98	3.9	99	31.2	14.2
J550	7J9550FHX	Old Style	13.0	330	11.0	279	4.7	119	4.3	110	50.2	22.7

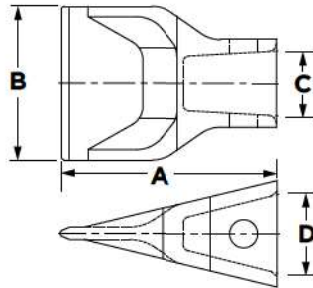


TYPE 14 - STANDARD FLARE

Cat Tooth Series	Flare Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J225	6Y3222F	Standard	5.75	146	4.6	117	1.9	49	2.3	60	5.9	2.7
J300	1U3302FHX	Standard	7.5	191	6.0	152	2.6	67	3.0	77	10.4	4.7
J350	1U3352FHX	Standard	9.5	241	7.0	178	2.9	75	3.3	84	18.1	8.2
J400	7T3402F	Standard	10.3	262	8.25	210	3.5	88	3.7	93	25.6	11.6
J460	1U3452FHX	Standard	11.25	286	9.0	229	3.9	98	3.9	99	34.5	15.6
J550	1U3552FHX	Standard	13.75	349	11.0	279	4.7	119	4.3	110	65.0	29.5
J600	6I6602F	Standard	16.0	406	12.5	317	5.6	143	5.2	133	89.0	40.4

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH WITH TUNGSTEN CARBIDE Caterpillar Style

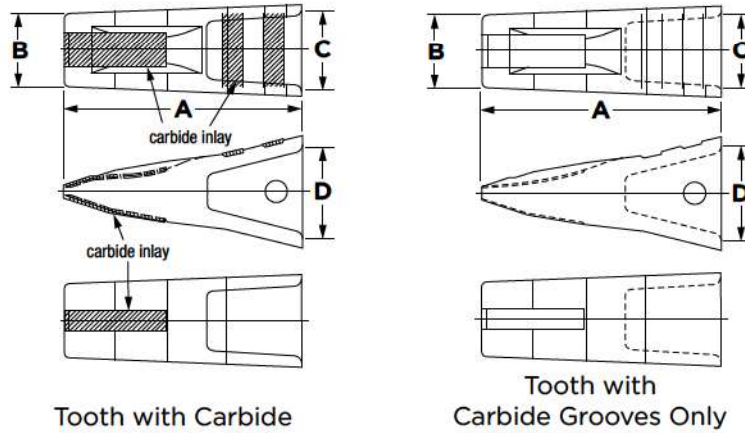

HEAVY LONG ABRASION ACE												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
	Part No.	Description	A		B		C		D			
			"	mm	"	mm	"	mm	"	mm	lb	kg
J300	125-8302HX	w/carbide	8.75	222	2.75	70	2.6	67	3.0	77	13.0	5.9
J400	116-7402HX	w/carbide	11.0	279	4.0	102	3.5	88	3.7	93	25.9	11.8
J400	116-7402CG	grooves only									24.6	11.2
J460	101-9054HX	w/carbide	12.5	317	4.5	114	3.9	98	3.9	99	39.3	17.8
J550	101-9055TC	w/carbide	13.75	349	5.75	146	4.7	119	4.3	110	60.0	27.2

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH WITH TUNGSTEN CARBIDE Caterpillar Style

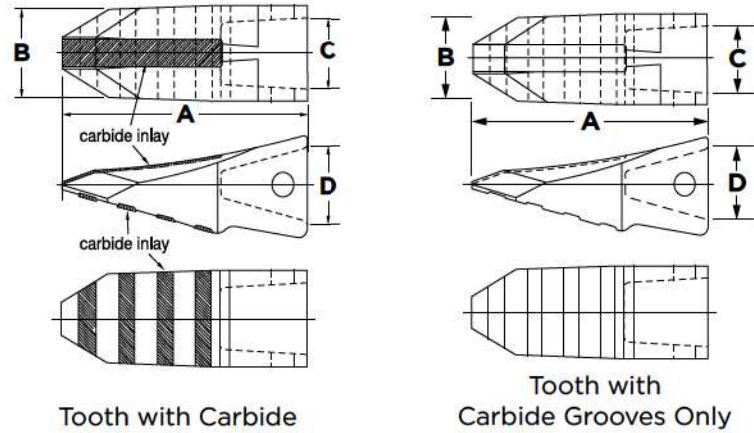

ROCK PENETRATOR ABRASION ACE												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
	Part No.	Description	A		B		C		D		lb	kg
			"	mm	"	mm	"	mm	"	mm		
J350	4T2353RP2TC	w/carbide	11.7	297	3.75	95	2.9	75	3.3	84	26.5	12.0
J350	4T2353RP2CG	grooves only									25.0	11.3
J400	7T3403RP2TC	w/carbide	13.0	330	4.1	105	3.5	88	3.7	93	34.5	15.6
J400	7T3403RP2CG	grooves only									32.5	14.7
J460	9W1453RP2TC	w/carbide	13.8	351	4.8	123	3.9	98	3.9	99	47.0	21.3
J460	9W1453RP2CG	grooves only									45.0	20.4
J550	9W1553RP2TC	w/carbide	14.75	375	5.2	131	4.7	119	4.3	110	56.0	25.4
J550	9W1553RP2CG	grooves only									56.0	25.4

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH WITH TUNGSTEN CARBIDE Caterpillar Style

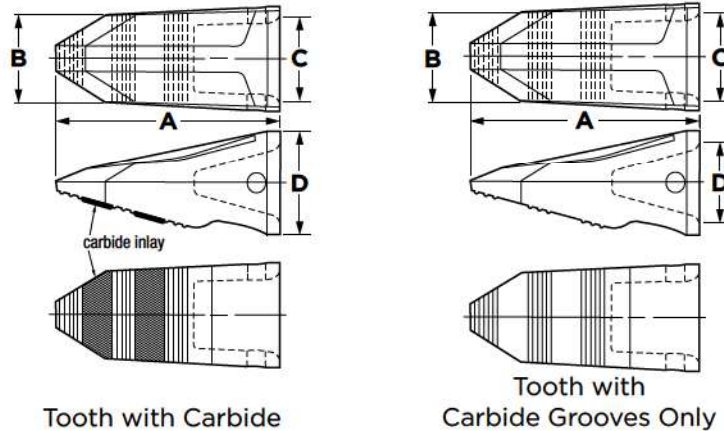

Tooth with Carbide

Tooth with
Carbide Grooves Only


HEAVY DUTY PENETRATOR ABRASION ACE

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
	Part No.	Description	A		B		C		D			
			"	mm	"	mm	"	mm	"	mm	lb	kg
J300	135-9300RHX	grooves only	10.3	262	3.1	78	2.6	67	3.0	77	25.0	11.4
J350	144-1358RTC	w/carbide	11.4	289	3.3	84	2.9	75	3.3	84	25.5	11.6
J350	144-1358RHX	grooves only										
J400	135-9400RTC	w/carbide	12.3	313	4.0	102	3.5	88	3.7	93	39.0	17.7
J400	135-9400RHX	grooves only										
J460	138-6451RTC	w/carbide	13.75	349	4.75	121	3.9	98	3.9	99	50.5	22.9
J460	138-6451RHX	grooves only										
J550	138-6552RTC	w/carbide	15.0	381	5.25	133	4.7	119	4.3	110	67.0	30.4
J550	138-6552RHX	grooves only										
J600	135-9600RTC	w/carbide	17.6	447	6.7	170	5.6	143	5.2	133	122.7	55.7
J600	135-9600RHX	grooves only										

MISCELLANEOUS ADAPTER DETAILS


1 pc. Bolt-On Tooth
132-4720HX
4.6 lb / 2.1 kg

Direct replacement for Cat® 132-4720 tooth. Fits Cat 216, 226, 236 and 246 series skid steer loaders. Uses (1) 11/16 x 2 1/4 hex bolt w/lock nut and (1) 11/16 x 2 hex head bolt w/lock nut.

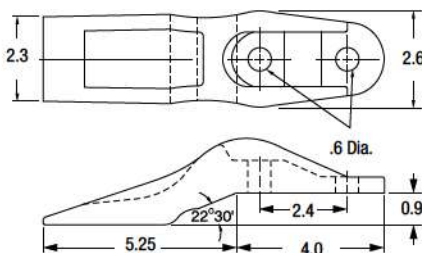


1 pc. Bolt-On Tooth
138-6410HX
2.6 lb / 1.2 kg

Direct replacement for Cat® 138-6410 tooth. Fits Cat 301.5 mini-excavators. Uses (2) 1/2 x 1 1/2 hex head bolt w/lock nut.

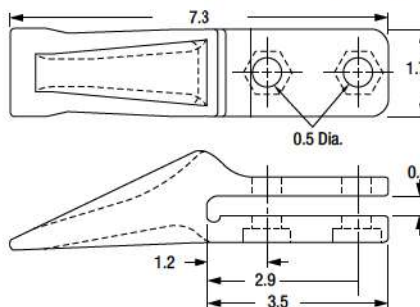

1 pc. Bolt-On Tooth
135-9390HX
3.6 lb / 1.6 kg

Direct replacement for Cat® 135-9390 tooth. Fits Cat 302.5 mini-excavators. Uses (2) 5/8 x 2 hex head bolts w/lock nut.

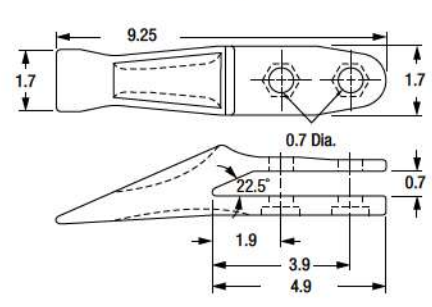


Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


Note: Measurements are in inches.

REPLACEMENT FASTENER DETAILS

Caterpillar Style



SINGLE PIECE SNAP RING PIN						
Pin Part No.	Dimensions				Weight	
	A		B			
	"	mm	"	mm	lb	kg
8J1433P	3.25	83	0.75	19	0.1	0.05
7J9600P	5.0	127	1.0	25	1.0	0.5
6J8811P	4.4	111	1.25	32	1.4	0.6
3G0500P	6.0	152	1.25	32	1.8	0.8
6Y2443P	6.1	156	1.4	35	2.5	1.1




TWO PIECE PIN & WASHER SYSTEM						
Part No.	Dimensions				Weight	
	A		B (Dia.)			
	"	mm	"	mm	lb	kg
9W7112P	2.3	59	0.4	11	0.1	0.04
6Y3228P	2.6	67	0.6	14	0.1	0.04
9J2258P	3.1	79	0.6	14	0.1	0.04
9J2308P	3.6	92	0.6	14	0.2	0.09
9J6583P	3.4	87	0.75	19	0.3	0.1
9W2678P	4.2	106	0.75	19	0.5	0.2
9J2358P	4.25	108	0.75	19	0.5	0.2
6Y2527P	5.25	133	0.75	19	0.6	0.3
7T3408P	4.6	117	0.9	22	0.6	0.3
8E0468P	5.25	133	0.9	24	1.0	0.4
6Y3394P	4.9	125	1.0	25	1.1	0.5
6Y8558P	6.4	162	1.0	25	1.2	0.5
6Y3909P	5.6	143	1.25	32	1.9	0.9
6I6608P	7.6	194	1.1	29	2.3	1.0
8E2229P	6.3	160	1.4	35	2.6	1.2
4T4708P	7.7	195	1.25	32	2.7	1.7

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

REPLACEMENT FASTENER DETAILS

Caterpillar Style



TWO PIECE PIN & WASHER SYSTEM CONTINUED

Steel Washer Part No.	Dimensions						Weight	
	A (O.D.)		B (I.D.)		C			
	"	mm	"	mm	"	mm	lb	kg
4T0001W	0.75	19	0.4	10	0.3	7	0.1	0.05
3G9609W	1.1	29	0.5	13	0.3	9	0.1	0.05
3G9609WHR*	1.1	29	0.5	13	0.3	9	0.1	0.05
6Y9459W	1.5	38	0.7	18	0.3	9	0.1	0.05
6Y9459WHR*	1.5	38	0.7	18	0.3	9	0.1	0.05
7T3409W	1.6	40	0.8	21	0.3	9	0.2	0.09
7T3409WHR*	1.6	40	0.8	21	0.3	9	0.2	0.09
8E0469W	1.7	43	0.9	23	0.3	9	0.2	0.09
8E0469WHR*	1.7	43	0.9	23	0.3	9	0.2	0.09
8E5559W	2.0	51	1.0	25	0.3	9	0.2	0.09
6I6609W	2.25	57	1.2	29	0.3	8	0.3	0.14
4T4707W	2.5	64	1.2	31	0.4	10	0.4	0.19
10I2874W	2.7	68	1.3	34	0.4	9	0.5	0.23

*Harder Rockwell


MISCELLANEOUS PINS

Flex Pin for Ripper Teeth
5J9000P
0.7 lb / 0.3 kg


Used on 9J6586HX
Ripper Shank
2K6413P
4.2 lb / 1.9 kg

Used on Compactor Feet
7K9937P
0.4 lb / 0.2 kg

Used on Compactor Feet
7K9535P
0.4 lb / 0.2 kg

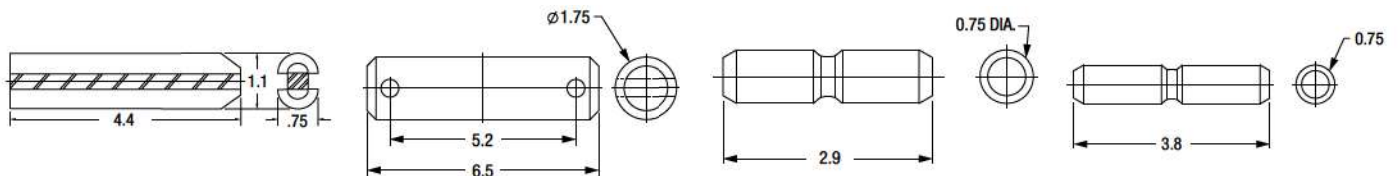


BOLT-ON ADAPTERS FOR LOADERS Caterpillar Style

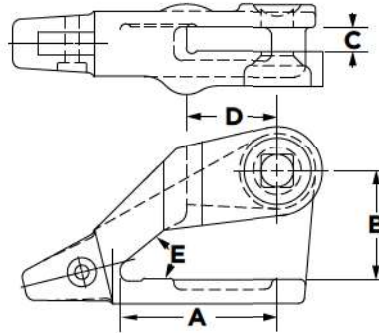

RH Shown, LH Opposite

BOLT-ON CORNER ADAPTERS FOR LOADERS

Hensley Part No.	Cat Tooth Series	Dimensions									Weight		Plow Bolts		
		A		B		C		D		E	lb	kg	Size	Assy. No.	Qty.
		"	mm	"	mm	"	mm	"	mm				"		
3G4258HX (LH) & 3G4259HX (RH)	J250	5.75	146	4.2	106	1.1	27	3.0	76	43°	25.0 ea.	11.3 ea.	1 x 3 1/4	AC10-314	1 ea.
3G4308HX (LH) & 3G4309HX (RH)	J300	7.0	178	4.75	121	1.1	27	4.1	103	39°	34.9 ea.	15.8 ea.	1 1/4 x 4	AC114-400	1 ea.
3G8308HX (LH) & 3G8309HX (RH)	J300	8.0	203	5.5	140	1.6	40	5.1	130	47°	35.9 ea.	16.3 ea.	1 1/4 x 4	AC114-400	1 ea.
3G5358HX (LH) & 3G5359HX (RH)	J350	8.5	217	5.6	143	1.6	40	5.1	129	38°	51.3 ea.	23.3 ea.	1 1/4 x 4	AC114-400	1 ea.

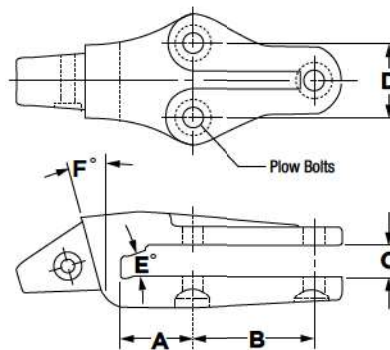


3 HOLE BOLT-ON ADAPTERS FOR LOADERS

Hensley Part No.	Cat Tooth Series	Dimensions										Weight		Plow Bolts		
		A		B		C		D		E	F			Size	Assy. No.	Qty.
		"	mm	"	mm	"	mm	"	mm			lb	kg	"		
8J5307HX	J300	3.4	86	5.75	146	1.3	33	3.25	83	23°	17°	30.6	13.8	1 x 4 1/4	A10-414	3
3G1357HX	J350	3.4	86	5.75	146	1.3	33	3.25	83	23°	16°	38.4	17.4	1 x 4	AC10-400	3
3G2357HX	J350	4.2	106	6.1	156	1.8	46	3.25	83	20°	15°	46.0	20.9	1 x 4 1/2	AC10-412	3

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

BOLT-ON ADAPTERS FOR LOADERS Caterpillar Style

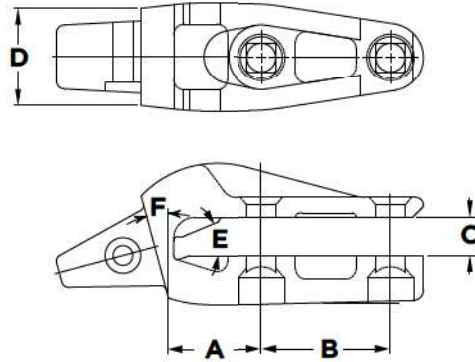


2 HOLE BOLT-ON ADAPTERS FOR LOADERS

Hensley Part No.	Cat Tooth Series	Dimensions								Weight		Plow Bolts		
		A		B		C		E	F			Size	Assy. No.	Qty.
		"	mm	"	mm	"	mm			"	lb	kg		
9W6207HX	J200	2.0	50	2.9	75	0.9	22	23°	14°	4.8	2.2	5/8 x 2 1/2	A58-212	2
1U4207HX	J200	2.6	67	3.5	89	0.8	21	30°	14°	8.5	3.9	3/4 x 3	A34-300	2
1U257HX	J250	2.75	70	4.9	124	1.1	27	23°	14°	18.0	8.2	1 x 3 3/4	AC10-334	2
8J6656HX	J250	2.75	70	4.9	124	1.1	27	27°	13°	18.4	8.3	1 x 4	A10-400	2
1U307HX	J300	2.75	70	4.9	124	1.1	27	23°	14°	25.4	11.5	1 x 4	A10-400	2
8J6587HX	J300	2.75	70	4.9	124	1.1	27	23°	15°	27.5	12.5	1 x 4	A10-400	2
4T4307HX	J300	3.2	91	6.5	165	1.3	33	23°	14°	29.3	13.3	1 x 4 1/4	AC10-414	2
3G9307HX	J300	3.4	86	6.3	160	1.3	33	23°	14°	31.9	14.5	1 1/4 x 4 1/2	AC114-412	2
3G3357HX	J350	3.9	98	5.9	149	1.7	43	24°	14°	43.9	19.9	1 1/4 x 5	AC114-500	2
3G7357HX	J350	3.4	86	6.3	159	1.3	34	23°30'	15°	46.2	20.9	1 1/4 x 4 1/4	AC114-414	2
1U1357HX	J350	4.0	102	6.1	156	1.8	46	20°	14°	44.7	20.3	1 1/4 x 5	AC114-500	2
6I9898HX	J400	4.2	106	6.1	156	1.8	46	22°30'	14°	62.0	28.1	1 1/4 x 5	AC114-500	2

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

WELD-ON ADAPTERS FOR LOADERS Caterpillar Style



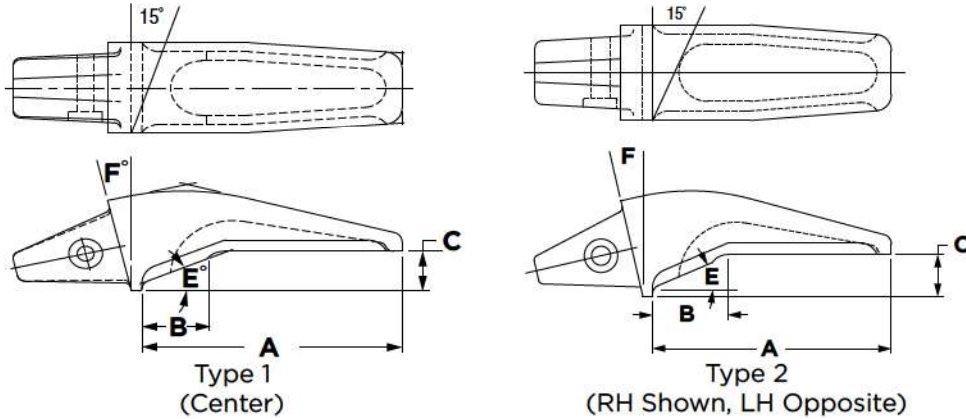


CURRENT FLUSH MOUNT WELD-ON ADAPTERS FOR LOADERS

Hensley Part No.	Cat Tooth Series	Type	Dimensions								Weight	
			A		B		C		E	F	lb	kg
			"	mm	"	mm	"	mm				
1U1254HXC	J250	1	9.25	235	2.0	51	1.0	25	22°	13°	14.3	6.5
1U1304HXC	J300	1	9.4	238	2.3	59	1.1	27	22°	14°	19.4	8.8
1U1354HXC	J350	1	11.25	286	3.2	81	1.5	38	22°	14°	31.7	14.4
107-3404HX	J400	1	11.5	292	3.25	83	1.5	38	22°	14°	45.0	20.4
9J9584HXC2	J460	1	12.5	318	4.1	105	2.2	56	23°	13°	56.7	25.7
9J9585HXR2 & 9J9586HXL2	J460	2	13.75	349	4.1	105	2.2	56	23°	13°	64.6 ea.	29.3 ea.
8E0464HXC	J460	1	12.5	318	4.1	105	2.2	56	23°	13°	57.0	25.9
8E0465HXR & 8E0466HXL	J460	2	13.75	349	4.1	105	2.2	56	23°	13°	64.0 ea.	29.0 ea.
3G4554HXC	J550	1	14.9	378	5.0	127	2.7	68	23°	14°	80.6	36.6
3G4555HXR & 3G4556HXL	J550	2	15.6	397	5.0	127	2.7	68	23°	14°	87.8 ea.	39.8 ea.

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

WELD-ON ADAPTERS FOR LOADERS Caterpillar Style

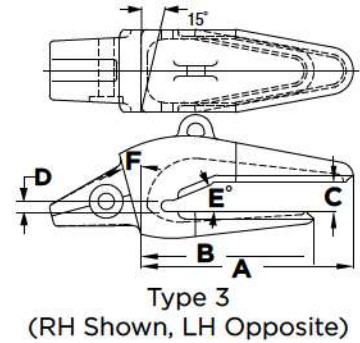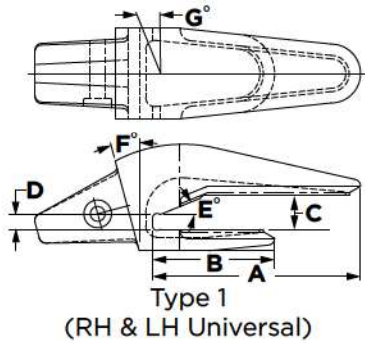


WRAP-AROUND WELD-ON ADAPTERS FOR LOADERS

Hensley Part No.	Cat Tooth Series	Type	Dimensions											Weight	
			A		B		C		D		E	F	G		
			"	mm	"	mm	"	mm	"	mm					
2740-416	J200	2	5.0	127	2.6	67	1.1	28	0.2	6	30°	12°		3.5	1.6
125-8404HX	J400	2	10.0	254	7.0	178	1.8	47	0.7	18	22°	15°		43.9	19.9
125-8405HX & 125-8406HX	J400	3	10.4	265	7.4	189	1.8	47	0.7	18	22°	15°	15°	46.2 ea.	20.9 ea.
9J6698HXC	J460	2	11.4	289	7.9	200	2.1	54	0.6	16	22°	15°		52.0	23.6
9J6701HXR & 9J6702HXL	J460	3	12.5	318	9.0	229	2.1	54	0.75	19	22°	15°		57.0 ea.	25.9 ea.
8E3464HXC	J460	2	10.4	264	6.9	175	2.1	54	0.75	19	22°	12°		50.0	22.7
8E3465HXR & 8E3466HXL	J460	3	12.5	318	9.0	229	2.1	54	0.75	19	22°	12°		55.0 ea.	24.9 ea.
303J460	J460	2	12.75	324	9.75	248	2.6	67	0.6	16	30°	12°		70.0	31.8
3G9494HXC	J550	2	14.25	362	12.6	321	2.6	67	1.1	27	22°	15°		76.5	34.7
3G9495HXR & 3G9496HXL	J550	3	15.0	381	13.4	340	2.6	67	1.1	27	22°	15°		81.7 ea.	37.1 ea.
9W9704HXC	J700	2	17.2	437	13.7	347	2.6	67	1.0	25	22°	15°		164.0	74.4
9W9705HXR & 9W9706HXL	J700	3	17.5	445	14.0	356	2.6	67	1.0	25	22°	15°	15°	175.0 ea.	79.4 ea.
4T4704HXC	J700	2	18.1	460	13.1	333	3.1	78	1.0	25	22°	15°		164.0	74.4
4T4705HXR & 4T4706HXL	J700	3	18.1	460	13.1	333	3.1	78	1.0	25	22°	15°	15°	172.0	78.0

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

WELD-ON ADAPTERS FOR LOADERS Caterpillar Style

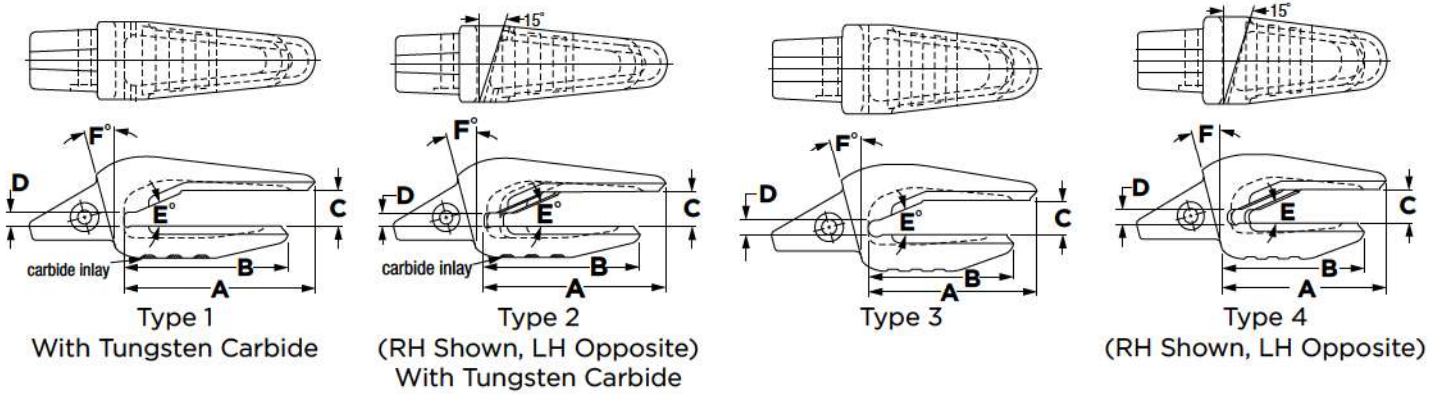


WRAP-AROUND WELD-ON ADAPTERS FOR LOADERS

Hensley Part No.	Cat Tooth Series	Type	Dimensions										Weight	
			A		B		C		D		E	F		
			"	mm	"	mm	"	mm	"	mm			lb	kg
107-3554HX	J550	3	14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	92.0	41.7
107-3555HX(RH) & 107-3556HX(LH)	J550	4	14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	97.0	44.0
112-2554HX	J550	1	14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	94.0	42.6
112-2555HX(RH) & 112-2556HX(LH)	J550	2	14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	98.0	44.5
119-8604HX	J600	3	14.5	368	12.5	305	2.9	73	1.2	30	22°	15°	156.0	70.8
119-8605HX(RH) & 119-8606HX(LH)	J600	4	14.5	368	12.5	305	2.9	73	1.2	30	22°	15°	169.0	76.7

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

WELD-ON ADAPTERS FOR BACKHOES & EXCAVATORS

Caterpillar Style

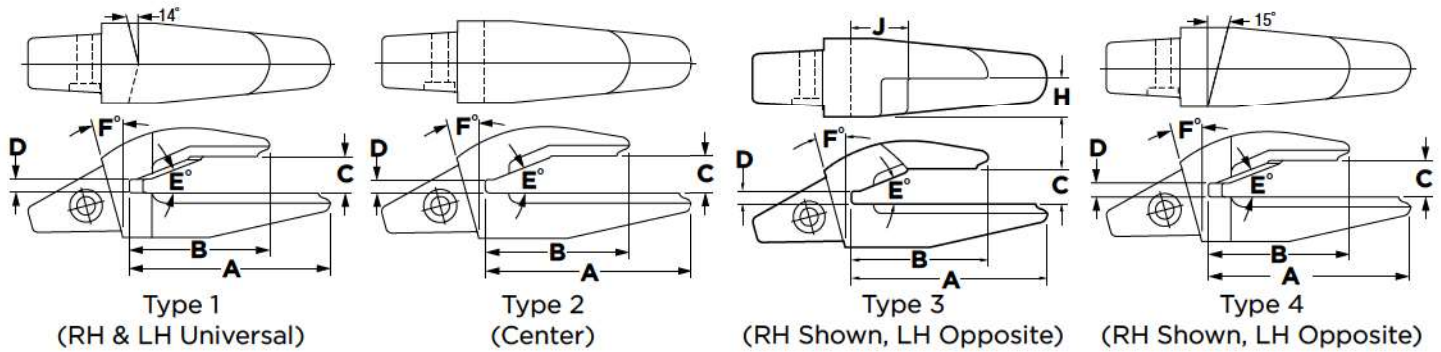




WRAP-AROUND WELD-ON ADAPTERS FOR BACKHOES & EXCAVATORS

Hensley Part No.	Cat Tooth Series	Type	Dimensions														Weight	
			A		B		C		D		E	F	H		J		lb	kg
			"	mm	"	mm	"	mm	"	mm	°	°	"	mm	"	mm		
119-3204HX	J200	2	3.25	83	4.25	108	1.1	29	0.5	13	22°	9°					4.1	1.9
6Y3224HX	J225	2	5.6	141	3.7	94	1.1	27	0.4	11	22°	8°					7.3	3.3
6Y3254HX	J250	2	6.1	156	5.0	127	1.3	33	0.4	10	22°	9°					11.2	5.1
9W1304HX	J300	2	7.5	191	5.25	133	1.3	33	0.4	11	22°	9°					17.3	7.8
8E9490HX	J300	2	8.25	210	5.9	149	1.6	40	0.5	13	23°	12°					17.2	7.8
3G6304HXC	J300	2	8.0	203	4.6	116	1.3	33	0.6	14	22°	8°					18.0	8.2
3G6305HXR & 3G6306HXL	J300	3	8.0	203	4.6	116	1.3	33	0.6	14	22°	8°	1.4	37	1.9	48	17.5 ea.	7.9 ea.
3G8354HXC	J350	2	8.25	210	4.75	121	1.7	43	0.6	16	35°	8°					20.9	9.5
3G8355HXR & 3G8356HXL	J350	3	8.25	210	4.75	121	1.7	43	0.6	16	35°	8°	1.75	44	1.3	33	19.6 ea.	8.9 ea.
6I6354HX	J350	2	9.0	229	7.25	184	1.6	41	0.6	14	22°	12°					27.2	12.3
7T3404HXC	J400	2	9.5	241	6.75	171	1.9	48	0.75	19	22°	9°					33.5	15.2
8J9141HXC	J460	2	11.1	283	7.4	187	2.0	51	0.4	11	24°	9°					46.5	21.1
8E6464HXC	J460	2	11.1	283	7.4	187	2.0	51	0.4	11	24°	9°					46.5	21.1
8E6465HXR & 8E6466HXL	J460	3	11.1	283	7.4	187	2.0	51	0.4	11	24°	9°	2.1	54	3.5	89	46.5 ea.	21.1 ea.
6I6554HXC	J550	2	13.25	337	11.0	279	2.6	65	1.1	27	22°	9°					77.0	34.9
9J0174HXC	J550	2	14.5	368	8.6	219	2.4	62	0.9	22	23°	9°					77.2	35.0
9J0172HXR & 9J0173HXL	J550	3	14.5	368	10.0	254	2.4	62	0.9	22	23°	9°	2.2	56	3.4	86	78.2 ea.	35.5 ea.
6I6604HXC	J600	2	14.5	368	12.0	305	3.1	78	1.4	35	22°	9°					126.0	57.1
132-4705RHX & 132-4706LHX	J700	4	14.5	368	12.0	305	3.1	78	1.4	35	22°	9°					135.0	61.2

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


WELD-ON ADAPTERS FOR BACKHOES & EXCAVATORS

Caterpillar Style

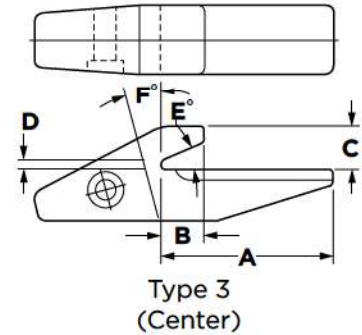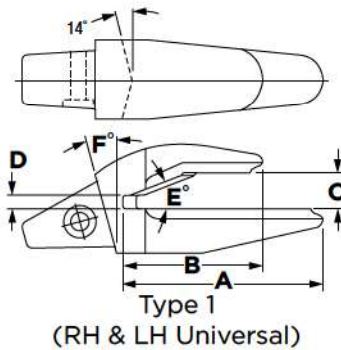

BOTTOM LEG WELD-ON ADAPTERS

Hensley Part No.	Cat Tooth Series	Type	Dimensions										Weight	
			A		B		C		D		E	F	lb	kg
			"	mm	"	mm	"	mm	"	mm				
8J7525HX	J200	3	3.9	100	1.0	25	1.0	25	0.25	6	23°	14°	3.1	1.4
3G0169HX	J250	3	7.5	191	2.3	59	2.0	51	0.3	8	22°	15°	11.7	5.3



WELD-ON NOSES

Weld-on Part No.	Cat Tooth Series	Dimensions						Weight	
		A		B		C		lb	kg
		"	mm	"	mm	"	mm		
8J7525WN	J200	0.9	24	2.3	59	2.25	57	2.5 est.	1.1 est.
6Y3224WN	J225	1.1	29	3.2	81	2.6	65	3.8 est.	1.7 est.
9J4254WN	J250	1.1	29	3.25	83	2.75	70	5.1	2.3
9J4304WN	J300	1.5	38	3.5	89	3.5	89	8.8	3.9
9J4354WN	J350	1.25	32	4.4	111	4.0	102	10.7	4.8
7T3404WN	J400	1.4	35	5.0	127	4.6	117	15.2	6.9
3G4454WN	J460	1.5	38	5.1	130	5.0	127	19.3	8.8
8E6464WN*	J460	1.5	38	5.1	130	5.0	127	19.8	9.0
9J4554WN	J550	1.75	44	5.5	140	5.75	146	29.6	13.4
6I6604WN	J600	1.9	48	7.1	181	7.6	194	53.0	24.0

*Larger pin hole diameter for oversize fasteners.



Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

CAST LIPS FOR RTBS

Caterpillar Style


CAST LIPS FOR RTBs

12MCAT-12A-HX
35.3 lb / 16.0 kg
J200 Tooth Series
Std. Tooth: 1U3202HX

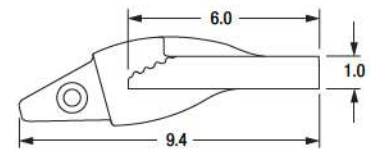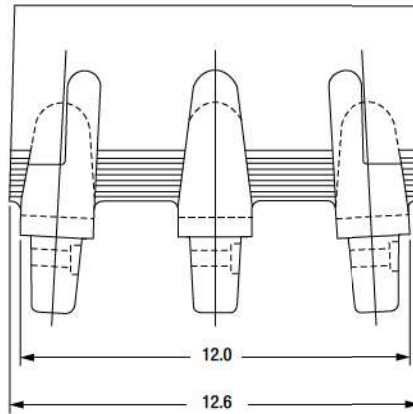


Side view of cast lips

18MCAT-12A-HX
46.6 lb / 21.2 kg
J200 Tooth Series
Std. Tooth: 1U3202HX

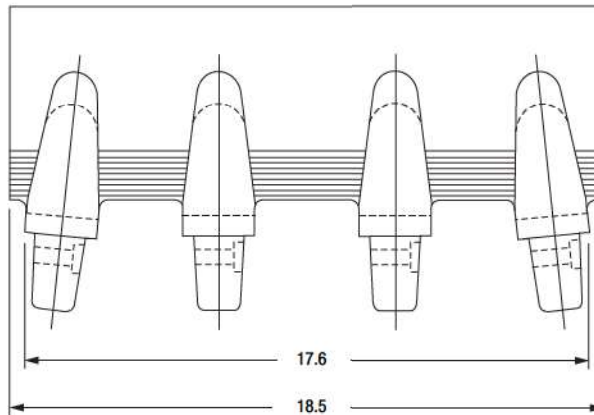

24MCAT-12A-HX
62.0 lb / 28.1 kg
J200 Tooth Series
Std. Tooth: 1U3202HX

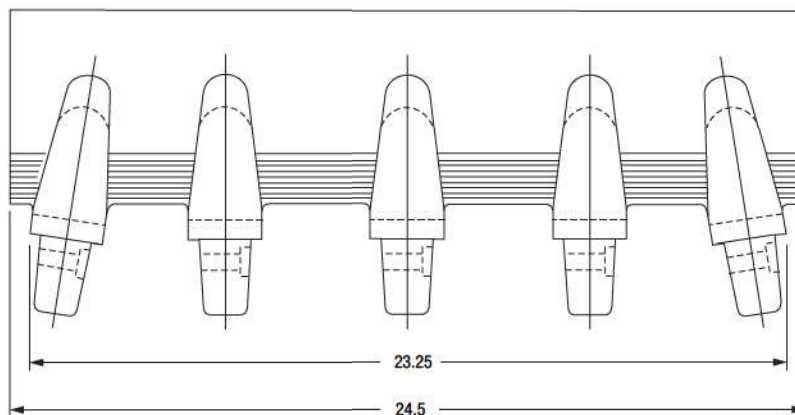

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

Note: Measurements are in inches.

TOOTH/MACHINE REFERENCE GUIDES

Caterpillar Style

TOOTH/MACHINE QUICK REFERENCE GUIDE

Cat Tooth Series	Standard Tooth	Backhoe Loaders	Early Model Excavators	Newer Model Excavators	Wheel Loaders	Crawler Loaders	Scrapers
J200	1U3202HX	416, 426, 428, 436, 438, (also D3/931 backhoe att.)			416, 426, 428, 436, 438, 910, 910E, F, 914G	931, 935	
J225	6Y3222HX	446	E70	307	446, 933		
J250	1U3252HX		205, 206, 211, 212, 213, 214, E110, E120B	311, 312	IT12, IT14, IT24F, IT26, IT28, IT38, 916, 918F, 920, 930, 936E, F; 938F, 939	941, 943, 951	613
J300	1U3302HX		215, 219, 224, E180, E200, EL200	315, 320A, B	944, 950, 950B, 950E, F; 960F, G, 962G, 966, 966C	953, 953B, C; 955L, 963, 963B	615, 619, J621, 623
J350	1U3352HX		225, 229, E240	320A, B; 322A, 322B, 325A, B	966D, E, F, G, 970F, 972G, 980, 980B, C, F	963B, 973, 977	633, 639
J400	7T3402HX		229	322A, B; 325A, 325B, 330A, B	980F, G		
J450 J460	9W8452HX		231, 235, 235B, 235C, E300	330A, B; 345B, 350	988, 988B, 988F	983	
J550	9W8552HX		245, 245B	345B, 350	988G, 990, 992, 992B, 992C, D		
J600	6I6602HX			375	992D, 992G		
J700	4T4702HX			375	992D, G; 994		

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR MINING MACHINES


Caterpillar Style

REPLACEMENT TEETH FOR EXCAVATORS AND LOADERS TOOTH SERIES REFERENCE CHARTS

Cat Tooth Series	Type 2 Long	Type 4 Tiger	Type 5 Twin Tiger	Type 6 Abrasive	Type 8 AGB (Abrasion)	Type 9 Penetrator
J600	6I6602HX 7V0602HX	T6I6602	6I6602WT	6I6603HX	-	-
J700	4T4702HX	-	-	4T4703HX	-	4T4709HX
J800	6I8802HX	-	-	6I8803HX	6I8803AB	-

REPLACEMENT TEETH FOR EXCAVATORS AND LOADERS TOOTH SERIES REFERENCE CHARTS CONTINUED

Type 10 Rock Penetrator	Type 11 Rock Chisel	Type 12 SYL	Type 14 Flare Standard	Type 15 UT Twin Tiger	Type 16 Heavy Duty Penetrator	Fasteners
6I6602RP2 6I6602RP3 135-9600RHX	6I6602RC	6I6602SYL	6I6602F	6I6602UT	135-9600RTC	6I6608P 6I6609W
4T4703RP2 4T4703RP3 135-9700RHC	4T4702RC	4T4702SYLHX	-	-	135-9700RTC	4T4708P 4T4707W
6I8803RP2 135-9800RHX	6I8802RC	6I8802SYL	-	-	135-800RTC	1020101P 1012874W




TYPE 2 - LONG

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	“	mm	“	mm	“	mm	“	mm	lb	kg
J600	6I6602HX	Excavator	15.0	381	6.5	165	5.6	143	5.2	132	72.0	32.7
J600	7Y0602HX	Excavator	16.0	406	6.5	165	5.6	143	5.2	132	91.0	41.3
J700	4T4702HX	Excavator	16.5	419	7.1	181	6.0	152	5.7	144	95.0	43.1
J800	6I8802HX	Excavator	18.75	476	8.5	216	6.75	171	6.4	162	194.0	88.0


Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR MINING MACHINES

Caterpillar Style



TYPE 4 - TIGER												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J600	T6I6602	Excavator	18.0	457	-	-	5.6	132	5.2	132	68.0	30.9




TYPE 5 - TWIN TIGER												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J600	6I6602WT	Excavator	18.0	457	9.25	235	5.6	143	5.2	132	76.0	34.5

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR MINING MACHINES

Caterpillar Style



TYPE 6 - ABRASIVE

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J600	6I6603HX	Loader	16.25	413	9.0	229	5.6	143	5.2	132	125.0	56.7
J700	4T4703HX	Excavator	16.4	416	9.0	229	6.0	152	5.7	144	105.0	47.6
J800	6I8803HX	Excavator	18.75	476	11.5	292	6.75	171	6.4	162	230.0	104.4




TYPE 8 - ABRASION

TYPE 8 - ABRASION												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J800	6I8803AB	Loader	18.75	514	8.75	222	6.75	171	6.4	162	205.0	93.0

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR MINING MACHINES

Caterpillar Style



TYPE 9 - PENETRATOR

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	“	mm	“	mm	“	mm	“	mm	lb	kg
J700	4T4709HX	Excavator	16.5	419	7.8	198	6.0	152	5.7	144	82.0	37.2




TYPE 10 - ROCK PENETRATOR

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	“	mm	“	mm	“	mm	“	mm	lb	kg
J600	6I6602RP2	Loader	17.75	451	6.25	159	5.6	143	5.2	132	109.0	49.5
J600	6I6602RP3	Loader	18.5	470	6.25	159	5.6	143	5.2	132	127.0	57.6
J600	135-9600RHX carbide grooves	Loader	17.6	447	6.7	170	5.6	143	5.2	132	121.0	54.9
J700	4T4703RP2	Loader	19.5	495	7.0	178	6.0	152	5.7	144	113.5	51.5
J700	4T4703RP3	Loader	19.5	495	7.0	178	6.0	152	5.7	144	148.0	67.2
J700	135-9700RHX carbide grooves	Loader	18.4	467	7.0	178	6.0	152	5.7	144	126.0	57.2
J800	6I8803RP2	Loader	21.0	533	7.5	191	6.75	171	6.4	162	207.0	94.0
J800	135-9800RHX carbide grooves	Loader	20.5	521	8	203	6.75	171	6.4	162	215.0	97.6

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR MINING MACHINES

Caterpillar Style

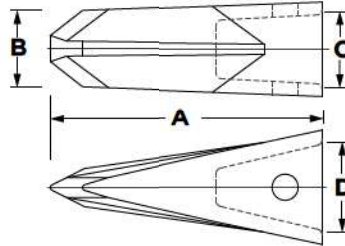

TYPE 11 - ROCK CHISEL

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J600	6I6602RC	Excavator	18.0	457	6.2	157	5.6	143	5.2	132	86.0	39.0
J700	4T4702RC	Excavator	19.0	483	6.5	165	6.0	152	5.7	144	98.0	44.5
J800	6I8802RC	Excavator	21.0	533	8.9	225	6.75	171	6.4	162	176.0	79.8




TYPE 12 - SYL

TYPE 12 - SYL												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	“	mm	“	mm	“	mm	“	mm	lb	kg
J600	6I6602SYL	Excavator	16.5	419	7.5	190	5.6	143	5.2	132	76.0	34.5
J700	4T4702SYL	Excavator	18.0	457	7.5	190	6.0	152	5.7	144	95.0	43.1
J800	6I8802SYL	Excavator	21.0	533	8.9	225	6.75	171	6.4	162	148.0	67.2

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.


TEETH FOR MINING MACHINES

Caterpillar Style

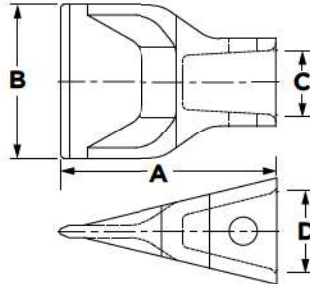

TYPE 14 - FLARE STANDARD

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J600	6I6602F	Excavator	16.0	406	12.5	317	5.6	143	5.2	132	89.0	40.4

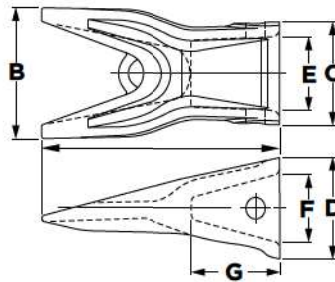


TYPE 15 - UT TWIN TIGER

Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	"	mm	"	mm	"	mm	"	mm	lb	kg
J600	6I6602UT	Excavator	18.0	457	9.9	251	5.6	143	5.2	132	85.0	38.6

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

TEETH FOR MINING MACHINES

Caterpillar Style




TYPE 16 - HEAVY DUTY PENETRATOR												
Cat Tooth Series	Standard Tooth		Dimensions								Weight	
			Overall Tooth				Tooth Pocket					
			A		B		C		D			
	Part No.	Description	“	mm	“	mm	“	mm	“	mm	lb	kg
J600	135-9600RTC with carbide in grooves	Loader	17.6	447	6.7	170	5.6	143	5.2	132	122.0	55.4
J700	135-9700RTC with carbide in grooves	Loader	18.4	467	7.0	178	6	152	5.7	144	126.0	57.2
J800	135-9800RTC with carbide in grooves	Loader	20.5	521	8.0	203	6.75	171	6.4	162	215.0	97.6

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

ADAPTERS FOR MINING MACHINES

REPLACEMENT ADAPTERS FOR EXCAVATORS AND LOADERS TOOTH SERIES REFERENCE CHARTS

Lip Thick-ness		Cat Tooth Series	1	2	5	11	12	13	Teeth Fasteners	
"	mm								Pins	Washers
3.0	76	J700	4T4704HXC 4T4705HXR 4T4706HXL	-	-	-	6I6604HX 132-4705THX 132-4706LHX		4T4708P	4T4707W
3.5	89	J700	358-994HXC 358-994HXR 358-994HXL	-	-	-	-		4T4708P	4T4707W
4.0	102	J800	6I8804HX 6I8804EHX	-	6I8804CEHX	-	-		1020101P	1012874W

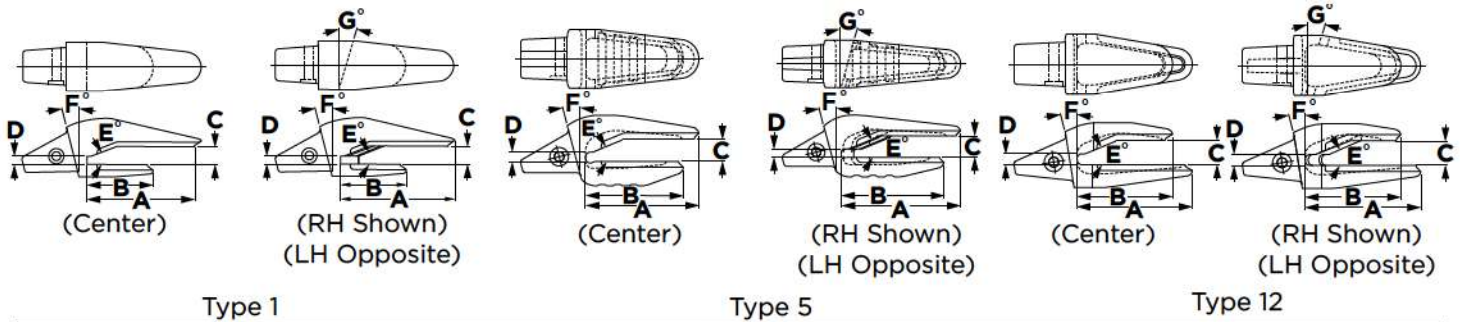


ADAPTERS

Lip Thickness		Hensley Part No.	Type	Cat Tooth Series	Dimensions												Weight		
					A		B		C		D		E	F	G	H			
“	mm				“	mm	“	mm	“	mm	“	mm							“
3.0	76	4T4704HXC	1	J700	18.1	460	13.1	333	3.1	78	1.0	25	22°-30'	15°	-	-	-	186.0	84.4
		4T4705HXR & 4T4706HXL	1		18.1	460	13.1	333	3.1	78	1.0	25	22°-30'	15°	15°	-	-	186.0	84.4
3.0	75	6I6604HX	12	J600	14.5	368	12.0	305	3.1	78	1.4	35	22°	9°	15°	-	-	126.0	57.2
		132-4705RHX 132-4706LHX	12	J700	14.5	368	12.0	305	3.1	78	1.4	35	22°	9°	15°	-	-	135.0	61.3
3.5	89	358-994HXC	1	J700	20.0	508	10.5	268	3.6	92	1.0	25	30°	15°	-	-	-	158.0	71.7
		358-994HXR & 358-994HXL	1		20.0	508	10.5	268	3.6	92	1.0	25	30°	15°	10°	-	-	158.0	71.7
4.0	102	6I8804HX	1	J800	17.25	438	13.25	337	4.1	105	1.3	33	22°-30'	15°	-	-	-	234.0	106.1
		6I8804EHX	1		17.25	438	13.25	337	4.1	105	1.3	33	30°	10°	-	-	-	232.0	105.3
		6I8804CEHX	5		17.25	438	13.25	337	4.2	106	1.3	33	30°	10°	-	3.2	81	270.0	122.6

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

ADAPTERS FOR MINING MACHINES

Caterpillar Style

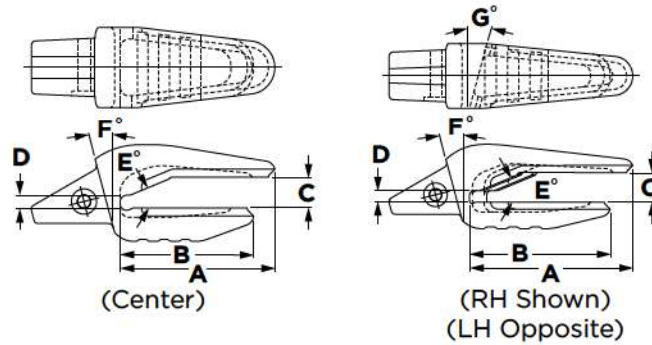

Type II


ADAPTERS WITH CARBIDE GROOVES

Lip Thickness		Hensley Part No.	Type	Cat Tooth Series	Dimensions										Weight		
					A		B		C		D		E	F			G
“	mm				“	mm	“	mm	“	mm	“	mm				lb	kg
2.5	63	107-3554HX	11	J700	14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	-	92.0	41.7
		107-3555HX (RH) & 107-3556HX (LH)	11		14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	-	97.0	44.0
2.5	63	112-2554HX	11	J700	14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	-	94.0	42.6
		122-2555HX (RH) & 122-2556HX (LH)	11		14.5	368	12.5	305	2.6	67	1.0	25	22°	15°	-	98.0	44.5
2.75	70	119-8604HX	11	J600	14.5	368	12.5	317	2.9	73	1.2	30	22°	15°	-	156.0	70.8
		119-8605HX (RH) 119-8606HX (LH)	11		14.5	368	12.5	317	2.9	73	1.2	30	22°	15°	15°	169.0	76.7


Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.

FASTENERS FOR MINING MACHINES

Caterpillar Style



PINS						
Part No.	Dimensions				Weight	
	A		B (Dia.)			
	"	mm	"	mm	lb	kg
4T4708P	7.7	195	1.25	32	2.7	1.2
1020101P	9.6	244	1.4	35	3.9	1.8
6I6608P	7.6	194	1.2	30	2.3	1.0




WASHERS								
Part No.	Dimensions						Weight	
	A (O.D.)		B (I.D.)		C			
	"	mm	"	mm	"	mm	lb	kg
4T4707W	2.5	64	1.2	31	0.4	10	0.4	0.2
1012874W	2.7	68	1.3	34	0.4	9	0.5	0.22
6I6609W	2.25	57	1.2	29	0.3	8	0.3	0.14

Note: 1020101P (pin) & 102874W (washer) are also utilized on 117-6801HX module style adapter cover.

WEAR PARTS FOR D11 DOZERS

Caterpillar Style

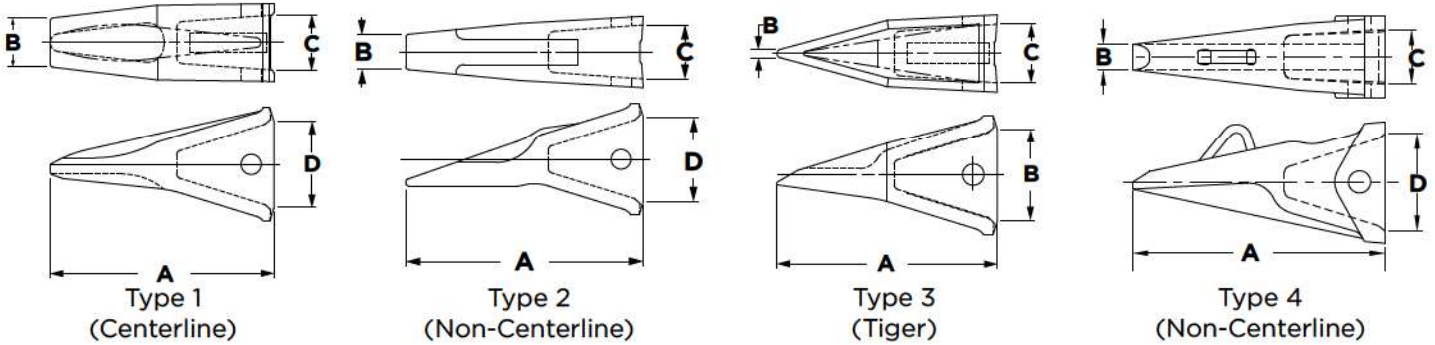

RIPPER TEETH													
Tooth Series	Ripper Tooth Part No.	Type	Dimensions								Weight		Fasteners
			Overall Tooth				Tooth Pocket						
			A		B		C		D				
			"	mm	"	mm	"	mm	"	mm	lb	kg	
R550	9W4551HX	1	17.6	448	3.0	76	4.6	116	8.4	213	88.5	40.1	8E2229P / 1012874W or 6Y2443P
	9W4552HX	1	21.25	540	3.0	76	4.6	116	8.4	213	107.0	48.5	
	6Y3552HX	2	21.25	540	3.1	80	4.6	116	8.4	213	100.0	45.4	
	T9W4552	3	20.0	508	-	-	4.6	116	8.4	213	96.7	43.9	

Cat® and Caterpillar® are registered trademarks of Caterpillar, Inc.